


GEELYE Wooden Modular Capsule Pod Specifications

Four size formats, horizontal and vertical layouts, single- and double-deck planning, configuration tiers, materials, utilities and project handover requirements.

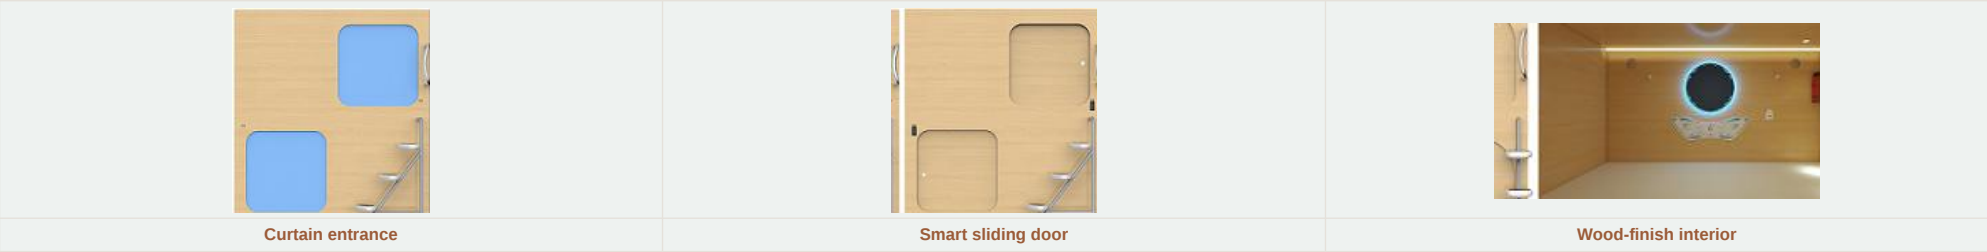

DOCUMENT	VALUE
Series	Wooden Modular Capsule Series
Confirmed size records	Small, Medium, Large and Plus / XL
Planning formats	Horizontal or vertical; single-deck or double-deck
Configuration tiers	Light Luxury, Flagship, Luxury and Supreme
Version	1.0
Issue year	2026
Commercial prices	Intentionally excluded from this long-term technical document

IMPORTANT Final configuration is subject to the approved drawings and sales contract.

Four-size quick-selection matrix

Choose the size record first, then orientation, deck format, material and equipment tier. Every project requires a site-specific layout check.

SIZE RECORD	OCCUPANCY	LAYOUTS	DECK FORMATS	TYPICAL SELECTION LOGIC
WOODEN-SMALL	Single guest	Horizontal / vertical	Single / double	Compact frontage and lower overall height
WOODEN-MEDIUM	Single guest	Horizontal / vertical	Single / double	Standard single-guest planning
WOODEN-LARGE	Single guest	Horizontal / vertical	Single / double	Wider single-guest interior
WOODEN-PLUS	Double guest	Horizontal / vertical	Single / double	Plus / XL double-guest format


Layout and deck planning

FORMAT	PROJECT IMPLICATION
Horizontal	Conventional bed-entry planning; ladder projection increases required aisle depth on double-deck sets.
Vertical	Alternative frontage planning; ladder projection increases overall length on double-deck sets.
Single-deck	One capsule module; ladder is not included.
Double-deck	One lower and one upper capsule with reinforced ladder and stainless steel handrail.

SIZE SELECTION - Small: compact single-guest module. - Medium: standard single-guest module. - Large: wider single-guest module. - Plus / XL: double-guest module.	DRAWING CONFIRMATION - Confirm door opening and access direction. - Confirm ladder projection and aisle clearance. - Confirm building services and maintenance access. - Confirm delivery route and assembly sequence.
---	---

Light Luxury, Flagship, Luxury and Supreme

The wooden exterior platform is shared. The table repeats only the genuine equipment-tier differences.

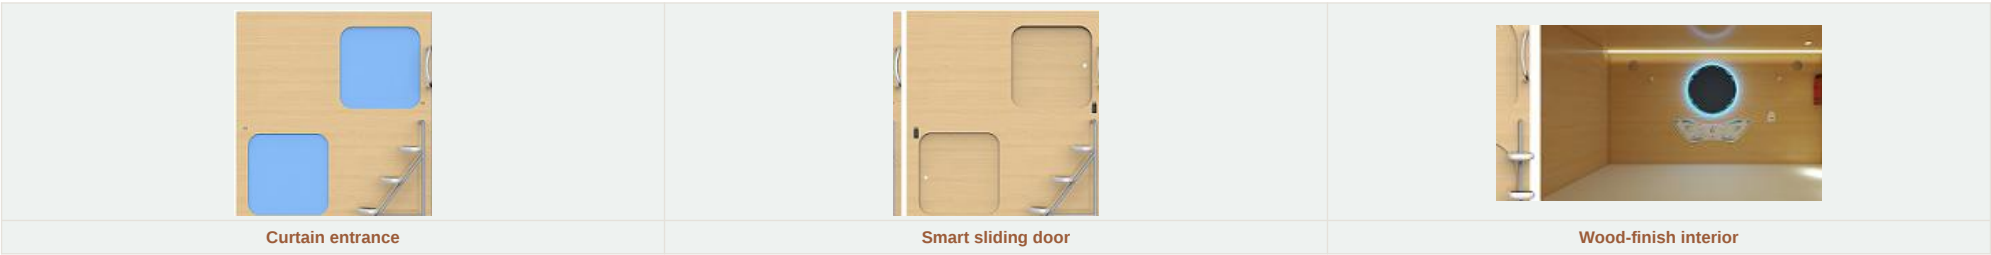

FEATURE	LIGHT LUXURY	FLAGSHIP	LUXURY	SUPREME
Entrance	Silent fabric curtain; internal safety latch	Safety sliding door; smart card lock; internal latch and luminous instruction label	Safety sliding door; smart card lock; internal latch and luminous instruction label	Safety sliding door; smart card lock; internal latch and luminous instruction label
Smoke alarm	Not included	Not included	Independent in-pod smoke alarm	Independent in-pod smoke alarm
Folding table	Not included	Not included	Multifunction folding laptop table	Multifunction folding laptop table
Backrest	Comfort padded backrest	Comfort padded backrest	Comfort padded backrest	Comfort padded backrest
Ceiling	Translucent ceiling light channel	Translucent ceiling light channel	Shaped translucent ceiling plate; illuminated star panel optional	Premium translucent multicolour double ceiling
Side star-light panels	Optional	Optional	Optional where specified	Optional where specified
Mirror	Translucent-pattern vanity mirror	Translucent-pattern vanity mirror	Translucent-pattern vanity mirror	Oversized premium translucent-pattern vanity mirror

Selection notes

- All four size records may be ordered in any listed equipment tier, subject to drawing and contract confirmation.
- Common controls, ventilation, lighting, ladder, handrail and structural requirements are consolidated on the following page.
- Entrance shape, panel styling, colour mixing, special branding and custom functions require an approved configuration schedule.

Merged Wooden Modular baseline

These shared items apply across the size records and equipment tiers unless a comparison-page difference or confirmed project option supersedes them.

EXTERNAL EQUIPMENT - Reinforced anti-slip and anti-collision ladder for double-deck sets; no ladder for single-deck units. - Safety stainless steel handrail and pod number plate. - Leakage-protection switch; reported component marks do not certify the complete pod. - Sound-absorbing anti-collision foam adhesive strips. - Power cable and low-voltage 12 V adapter package subject to destination requirements.	INTERNAL EQUIPMENT - Multicolour touch/slide smart control panel with 5-level LED-backlight adjustment. - Key-card power, negative-ion switch, Type-C and USB charging, headphone jack, TV switch, configured lock/escape and dimming controls. - Negative-ion air purification and four-module adjustable circulation system per double-deck set. - S-mark fire-extinguisher component and tier-specific translucent-pattern vanity mirror. - Space-aluminium coat hook and premium flame-retardant bed board designed to resist bedbugs, mould and deformation.
--	---

Lighting

ITEM	SHARED BASELINE
Ceiling lighting	Multicolour ceiling lighting; ceiling form varies by equipment tier.
Reading light	5-level dimmable reading light
Mirror light	Multicolour vanity-mirror lighting

Construction principle

- Wooden modular shell supported by a quality metal steel structural frame.
- Board type, thickness, edge treatment, hardware, finish and flame-retardant option must be fixed in the approved material schedule.
- The complete pod configuration is not represented as certified solely because a listed component or board sample carries a test report or mark.

Small and Medium size records

All dimensions are approximate and stated as length x width x height in millimetres. Final production and site planning must use the approved drawings.

SIZE / LAYOUT	SINGLE-DECK OUTER	DOUBLE-DECK WITHOUT LADDER	DOUBLE-DECK WITH LADDER	INTERNAL
Small - Horizontal	2012 x 1020 x 1395	2012 x 1020 x 2270	2012 x 1353 x 2270	1866 x 938 x 985
Small - Vertical	2010 x 1022 x 1395	2010 x 1022 x 2270	2322 x 1022 x 2270	1928 x 874 x 985
Medium - Horizontal	2112 x 1015 x 1513	2112 x 1020 x 2475	2112 x 1353 x 2475	1966 x 938 x 1085
Medium - Vertical	2110 x 1022 x 1513	2110 x 1022 x 2475	2422 x 1022 x 2475	2028 x 874 x 1085

SMALL - Double-deck height may be customised to 2160 mm, subject to approved drawings. - Horizontal and vertical internal dimensions differ. - Confirm customised-height implications for doors, panels and site services.	MEDIUM - Horizontal single-deck and double-deck widths differ by 5 mm in the confirmed record. - Double-deck height is 2475 mm. - Confirm ladder projection by orientation.
--	---

Dimension interpretation

- Single-deck outer dimensions describe one capsule module without a ladder.
- Double-deck dimensions describe one lower and one upper capsule; the with-ladder figure includes ladder projection.
- Figures do not replace aisle, assembly, maintenance, emergency-clearance or building-code requirements.

Large and Plus / XL size records

Large is a single-guest format; Plus / XL is the double-guest format. All dimensions remain subject to approved drawings.

SIZE / LAYOUT	SINGLE-DECK OUTER	DOUBLE-DECK WITHOUT LADDER	DOUBLE-DECK WITH LADDER	INTERNAL
Large - Horizontal	2112 x 1220 x 1513	2112 x 1220 x 2475	2112 x 1553 x 2475	1966 x 1138 x 1085
Large - Vertical	2110 x 1222 x 1513	2110 x 1222 x 2475	2422 x 1222 x 2475	2028 x 1074 x 1085
Plus / XL - Horizontal	2112 x 1515 x 1513	2112 x 1515 x 2475	2112 x 1853 x 2475	1966 x 1438 x 1085
Plus / XL - Vertical	2110 x 1522 x 1513	2110 x 1522 x 2475	2422 x 1522 x 2475	2028 x 1374 x 1085

LARGE

- Large single-guest width for projects requiring more internal shoulder clearance.
- Horizontal internal width: 1138 mm.
- Vertical internal width: 1074 mm.

PLUS / XL

- Double-guest format; confirm mattress, occupancy and circulation plan for the project.
- Horizontal internal width: 1438 mm.
- Vertical internal width: 1374 mm.

Project checks

- Confirm guest capacity, mattress specification and intended operating model.
- Confirm room plan, ceiling height, delivery route, door travel, ladder projection and service access.
- Confirm structural anchoring, floor loading, electrical routing and ventilation coordination with the project team.

Board options, construction, electrical and ventilation

Material grades and test evidence apply only to the matched board sample or supplied batch, not automatically to the complete capsule.

Board selection

OPTION	DESCRIPTION	EVIDENCE BOUNDARY
E0 particleboard	General environmentally graded board option	Match supplied thickness and batch to current evidence.
E1 multi-layer plywood	Multi-layer eco-board option	Match supplied thickness and batch to current evidence.
E0 multi-layer plywood	Higher environmental-grade multi-layer option	Match supplied thickness and batch to current evidence.
B1 flame-retardant plywood	Optional flame-retardant board selection	Current configuration-specific and batch-matched evidence is required.

CONSTRUCTION - Outer door panel: 18 mm - Outer side panels: 9 mm - Other wooden panels: 15 mm - Structural support: Quality metal steel frame	SOURCE-LISTED FINISHES - Raw wood - Light wood - White wood - Dark finish - Mixed or project-selected finish, subject to confirmation
--	--

Electrical and ventilation

SYSTEM	REQUIREMENT / PERFORMANCE	PROJECT COORDINATION
Electrical input	110-240 V AC input	Confirm voltage, frequency, plug/socket standard, connection method, protection and available load.
Cabin system	12 V low-voltage cabin system	Final adapter, controls, charging interfaces and socket package follow the confirmed configuration.
Ventilation	Four adjustable circulation modules per double-deck set; approximately 30 m3/h	Pod circulation does not replace building HVAC or room fresh-air design. Buyer MEP coordination is required.

Optional equipment

- Outer large/small decorative panels, including project-specific 9 mm side-panel treatments.
- Illuminated star-light side or ceiling panels where listed for the selected tier.
- Five-hole socket, project-specific accessories, custom functions, labels, colours, branding and destination electrical items where approved.

Buyer inputs and commercial delivery boundary

GEELYE uses the buyer's project information to prepare site-specific drawings, material schedules and configuration-specific supply and packing details.

BUYER MUST PROVIDE - Project country, city, building type and intended operation. - Dimensioned room plan, ceiling height, fixed obstructions and site photographs. - Capsule quantity, selected size, equipment tier and single- / double-deck count. - Horizontal / vertical arrangement, opening direction and preferred entrance styling. - Board type, grade, finish, thickness schedule, options and branding.	BUYER MUST ALSO CONFIRM - Local voltage, frequency, plug/socket standard and connection requirements. - Room HVAC and ventilation conditions, including supply and return strategy. - Delivery route dimensions, unloading restrictions and site installation plan. - Local compliance, fire-safety, accessibility and documentation requirements. - Target delivery date and destination port.
---	--

Commercial handover

ITEM	COMMERCIAL / HANDOVER TERM
Packaging	Packaging method, carton count, packed dimensions and gross/net weight are provided after final configuration confirmation.
Shipping	FOB terms. The named port is confirmed in the quotation or sales contract.
Installation	Customer installation. GEELYE provides an installation video and written instructions; site labour, tools, unloading and execution remain the customer's responsibility unless otherwise contracted.
Warranty	Two-year product warranty. Scope, start date, exclusions and claims follow the sales contract or warranty terms.
Post-warranty	Paid lifetime maintenance support is available after the warranty period, subject to parts availability and agreed service terms.
Options / custom items	Accessories, custom functions and outer large/small decorative panels are supplied only when included in the confirmed order.

FINAL CONFIGURATION NOTICE	Final configuration is subject to the approved drawings and sales contract.
-----------------------------------	--

Commercial prices, freight charges, installation charges and taxes are intentionally excluded from this long-term technical specification. Obtain the current quotation for commercial terms and values.